
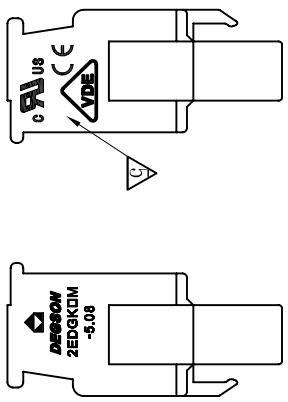

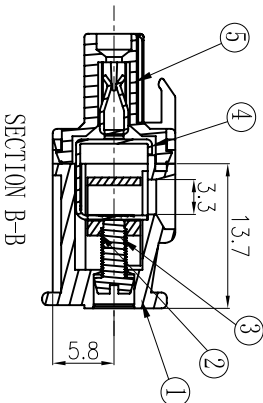
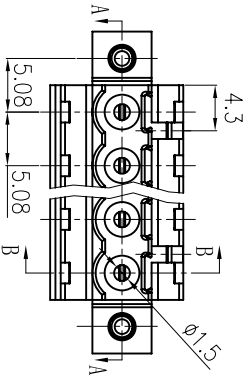
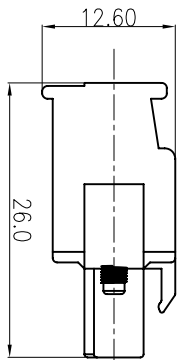
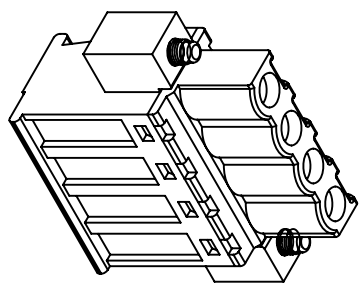

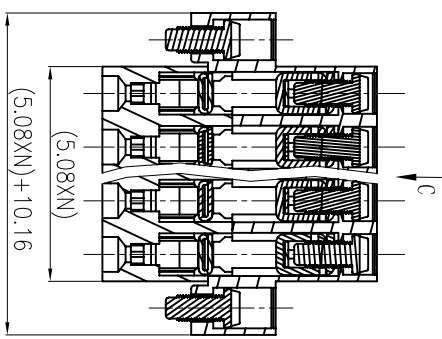


REVISION RECORD

REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing amend	CSX	04/18/06*
△		工程变更	CSX	11/20/06*
△		增加U.L.刻字	CSX	04/05/07*
△		品名、料号增加环保标示“(H)”	LJH	12/11/07*
△		增加VDE, CE刻字	WLM	02/12/09*
△	10-005	更新图纸	COCCO	05/05/10*



Notes:

1. Pitch: 5.08mm, Poles: 2-22P
2. Rated voltage/current: UL 300V/15A  
VDE 320V/10A
3. Operation temperatures: -45°C ~ +105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000 Ω / DC1000V
6. Wire Range: 28~12AWG, 2.5mm<sup>2</sup>
7. Max. Torque Value: M2: 5, 4, 0.8kgf.cm
8. Undimensioned Tolerances:

Pitch	range	in mm	Nominal dimension	range	in mm
over	to	over	to	over	to
6	10	10	30	60	100
10	24	30	60	100	150
H0.10	±0.15	±0.25	±0.2	±0.3	±0.5
					±0.7
					±1.0

ITEM	DESCRIPTION	QTY	MATERIAL	NOTES
5	2EDGKA/B-5.08 COVER	1	PA66	UL94V-0
4	2EDGKA/B-CLAMP	XX	Phospor Bronze	Ni plated
3	2EDG SCREW-M2.5	XX+2	Steel	Cr <sup>3+</sup> /Zn
2	DG128 CAGE	XX	Brass	Ni plated

ITEM	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
1	2EDGKAM/BM-5.08 HOUSING	1029401XXA(H)	1	PA66	UL94V-0

**DEGSON** 宁波德森电子有限公司  
DEGSON ELECTRONICS CO., LTD.

NAME: 2EDGKAM-5.08-XXP-1Y-00A(H)

DRAWING NO.: 2EDGKAM-5.08-ED1

SCALE: DO NOT SCALE DRAWING

SIZE: A3  
REV: 16/05/07