
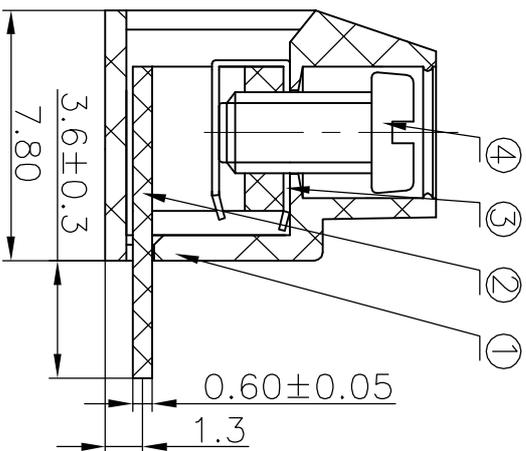


REVISION RECORD			
REV	ECOI	DESCRIPTION	DRFT DATE
△		Drawing Revise	03/20/06
△		增加规格字	12/15/06
△		品名、料号增加环保标示“(0)”	CSX 12/10/07

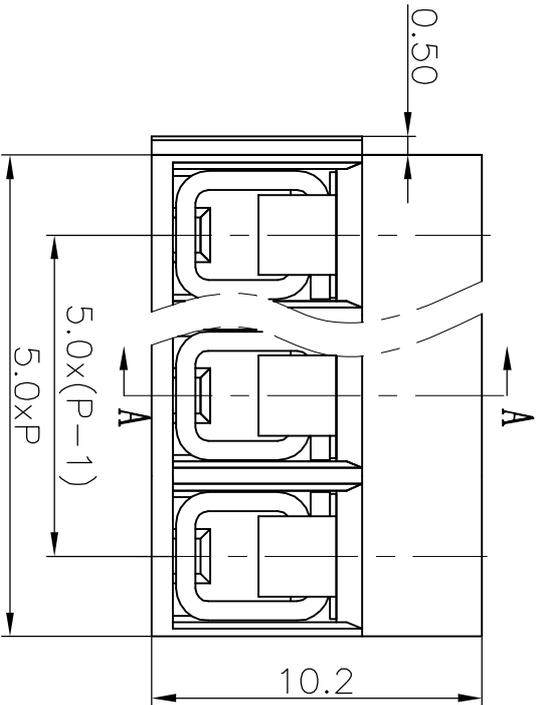

Pitch range in mm	Nominal dimension range in mm	
over 6 to 10	over 30 to 60	over 100 to 150
to 10	to 24	to 30
to 10	to 30	to 60
to 10	to 30	to 100
to 10	to 30	to 150
to 10	to 15	to 25
to 10	to 0.25	to 0.2
to 10	to 0.3	to 0.5
to 10	to 0.7	to 1.0
to 10	to 0.05	to 0.10

- Notes:
1. Pitch: 5.0mm
 2. Rated voltage/current: UL 300V/10A
VDE 250V/10A
 3. Operation temperatures: -40°C~+105°C
 4. Withstanding Voltage: AC1500V/1min
 5. Insulation Resistance: 5000MΩ/DC1000V
 6. Wire Range: 26~14AWG, 1.5mm²
 7. Max. Torque Value: 4.08kgf. cm
 8. Undimensioned Tolerances:

SECTION A-A

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG126R-5.0 Housing	4020A0YXXA (H)	1	PA66	UL94V-0

DETACHED LISTS	
MM	(INCH)
0 ±	±
0.05 ±	±
0.1 ±	±
0.2 ±	±
0.3 ±	±
0.5 ±	±
1.0 ±	±
1.5 ±	±
2.0 ±	±
3.0 ±	±
4.0 ±	±
5.0 ±	±
6.0 ±	±
8.0 ±	±
10 ±	±

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
2	DG126R Pin header	4020B00010 (H)	XX	Brass	
3	DG306 Spring	X000000160 (H)	XX	Steel	
4	DG126 Pin Screws M2.5	S000001510 (H)	XX	Steel	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG126R-5.0-XXP-1Y-00A(H)				