

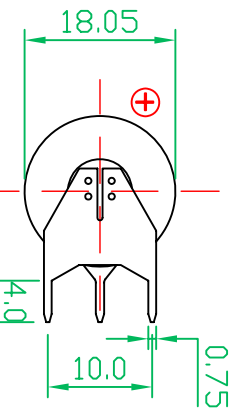
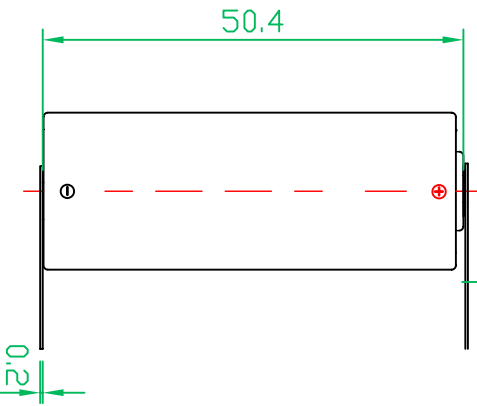


4.85±0.5

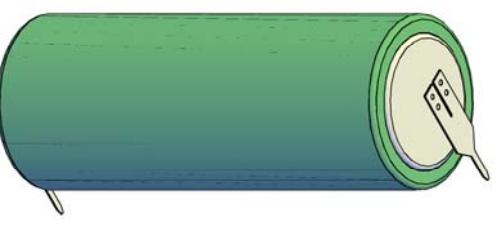

Insulation tube
(绝缘套管)

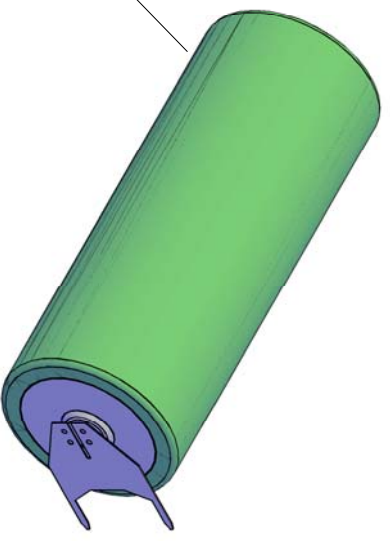

Remark(备注):
 1. Cell(电芯): 3.6V 4000mAh EEMB PVC with date code(包EEMB PVC, 表面喷码)
 2. + Axial pin/- Axial pin: Copper plated with nickel.
 正/负极轴向引线: 铜镀镍
 3. RoHS Compliant
 严格按照ROHS要求生产

		Drawn:	Hellingling	Revise No.:	E4-2009
		Checked 1:	Tangju	Projection:	
Title	ER18505-VBR	Checked 2:	Keyan	Page:	1/1
File NO.	A04584	Approved:		Scale:	1 : 1
		Draw Date:	2011/04/27	Unit:	mm