


Model:	LP383454LC	过充保护电压 (V)	/	
	Min. Capacity 最低容量 (mAh) (0.2C, 25±3°C) *Single cell capacity (单体电芯容量)	680	过放电保护电压 (V)	/
Battery pack specification 电池组规格	Typical Capacity 典型容量 (mAh) (0.2C, 25±3°C) *Single cell capacity (单体电芯容量)	720	Limited to Max loading current 仅用于最大的负载电流 peak value (A) 持续 / (A)	
	Nominal Voltage 标称电压 (V)	3.7	Customer required Max loading current 客户要求最大的负载电流 peak value (A) 持续 (A)	
Ambient Conditions (环境温度)	Internal impedance 内阻 (≦) (m _Ω AC 1KHZ)	200	Battery protection Related Value: (相关的电池保护值)	
	Charge Temp 充电温度 (°C)	0~45		
Discharge Temp 放电温度 (°C)	Humidity(湿度)		If actual application loading current is bigger than EEMB suggested please indicate. The application profile is important for an appropriate PCM design. (如果实际应用的负载电流大于EEMB提供值, 请提出来, 实际的应用情况对PCM的设计至关重要)	
	Humidity(湿度)		65±20%	



Title	LP383454LC-PCB-LD	Drawn:	YanF	Revise No.:	E4-2009
		Group:	Group1	Projection:	
File NO.	A18045	Approved1:		Page:	1/1
		Approved2:		Scale:	1 : 1
Draw Date:	2020/01/12	Unit:	mm		

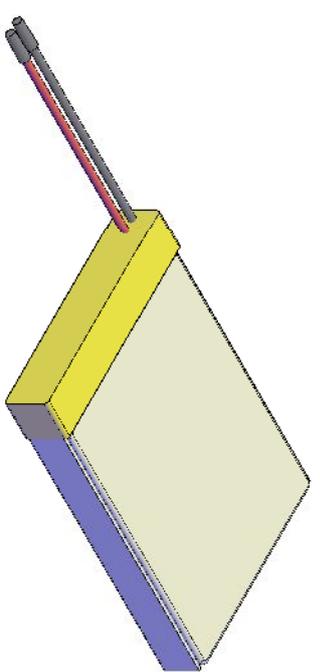

Remark(备注):
 1. No scratch, distortion, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).
 2. Rohs compliant(严格按照ROHS要求生产).

1 2 3 4 5 6