


Circuit diagram

Model: LP455255		Overcharge Detection Voltage(V)	4.25±0.05
Battery pack specification (电池组规格)	Min.Capacity 最低容量 (mAh) (0.2C,25±3°C)	Overdischarge Detection Voltage(V)	3.0±0.1
	Typical Capacity 典型容量 (mAh) (0.2C,25±3°C)	Limited to Max loading current 仅用于最大的负载电流 peak value (A) 峰值 1 (A)	constant (A) 持续 1 (A)
Ambient Conditions (环境温度)	Nominal Voltage 标称电压 (V)	Customer required Max loading current 客户要求最大的负载电流 peak value (A) 峰值 2 (A)	constant (A) 持续 (A)
	Internal impedance 内阻(≤) (mΩ,AC 1KHz)	If actual application loading current is bigger than EEMB suggested, please indicate. The application profile is important for an appropriate PCM design. (如实际应用的负载电流大于EEMB提供值, 请提出来, 实际的应用情况对PCM的设计至关重要)	
	Charge Temp. 充电温度(°C)	0~45	
Discharge Temp. 放电温度(°C)	Battery protection Related Value: (相关的电池保护值)		
	Humidity(湿度)	65±20%	

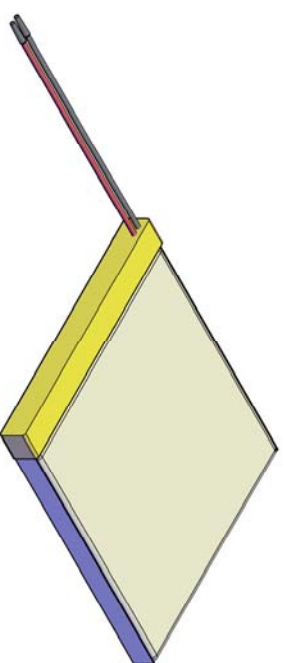

		Drawn:	Pengling	Revise No.:	E4-2009
		Checked 1:	Jane	Projection:	
Title	LP455255-PCM-LD	Checked 2:		Page:	1/1
File NO.	A05875	Approved:		Scale:	1:2
		Draw Date:	2012/02/10	Unit:	mm

Remark(备注):
1. No scratch, discoloration, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).
2. Rohs compliant(严格按照ROHS要求生产).