


Model: LP505597LC-3		Overcharge Detection Voltage(V)	4.28±0.05
Min. Capacity 最低容量 (mAh) (0.2C, 25±3°C)		Overdischarge Detection Voltage(V)	3.0±0.1
Typical Capacity 典型容量 (mAh) (0.2C, 25±3°C)		Limited to Max loading current	
9300		仅用于最大的负载电流	
Nominal Voltage 标称电压 (V)		峰值 4 (A)	持续 2 (A)
3.7		客户要求的最大负载电流	
Internal impedance 内阻 (≦) (m ,AC 1KHz)		峰值 (A)	持续 (A)
200		If actual application loading current is bigger than EEMB suggested, please indicate. The application profile is important for an appropriate PCM design. (如果实际应用的负载电流大于 EEMB 提供值, 请提出来, 实际的应用情况对 PCM 的设计至关重要)	
Charge Temp. 充电温度 (°C)		Ambient Conditions (环境温度)	
0~45		Discharge Temp. 放电温度 (°C)	
-40~45		Humidity (湿度)	
65±20%			

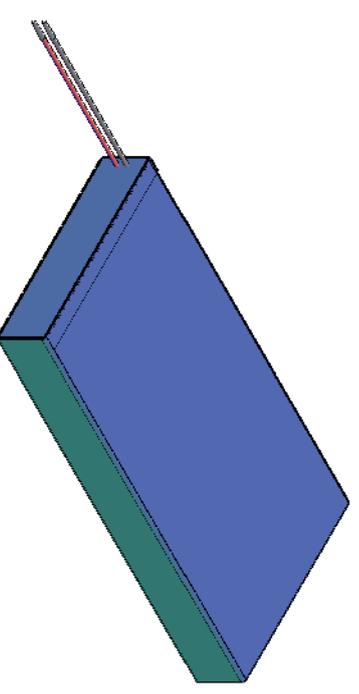

Remark(备注):
 1. No scratch, discoloration, discoloration and leakage on the appearance of the cell/电池表面无划痕、变形、污点及漏液等现象).
 2. RoHS compliant(严格按照ROHS要求生产).

		Drawn:	Yanf	Revise No.:	E4-2009
		Checked 1:	Daniel	Projection:	
Title		Checked 2:		Page:	1/1
File NO.		Approved:		Scale:	1 : 1
A14790		Draw Date:	2017/10/24	Unit:	mm