


Specification:

- 1) Rating: 1 A 125/250 VAC
- 2) Contact Resistance: 30 mW max.
- 3) Insulation Resistance: 250 VDC 100 MW min.
- 4) Dielectric strength: 1000 VAC, 1 minute
- 5) Operating Temperature: -25°C ~ +65°C
- 6) Electrical Life: 30000 cycles



MSM-21
1 A 125/250 VAC
SPDT 3P

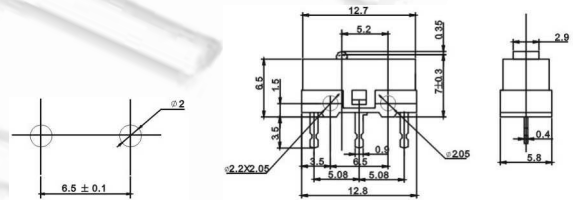

MSM-22
1 A 125/250 VAC
SPDT 3P

