



# Switch

## Toggle Switch Series

### KLS7-SRLS-102-A3 Sub-miniature Rocker Switch Series

#### SPECIFICATIONS

- Rating: 3A 125VAC; 1A 250VAC
- Contact Resistance: 20MΩ max
- Insulation Resistance: 500V DC 1000MΩ Min
- Dielectric Strength: 1000V AC 1 Minute
- Operating Temperature: -25°C~+65°C
- Electrical Life :20,000 cycles

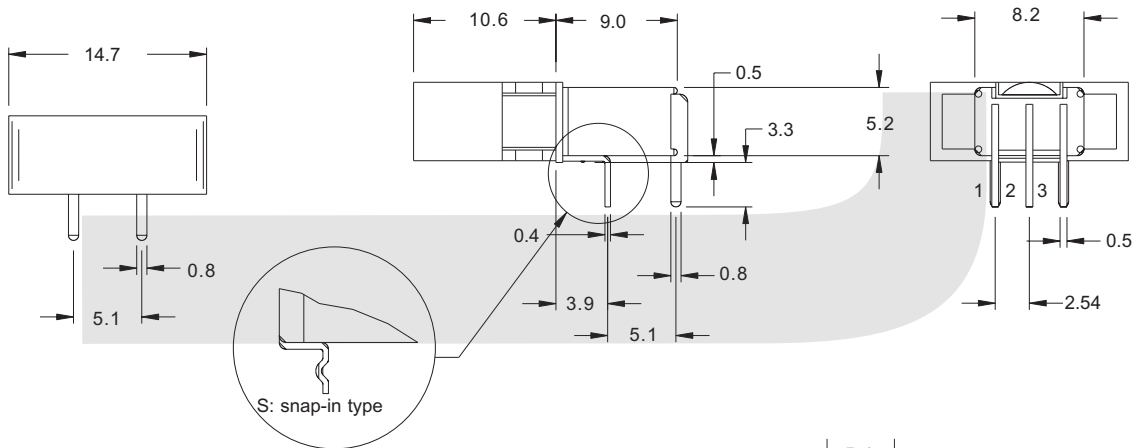

PCB LAYOUT

## ORDER INFORMATION

Part Number	<b>KLS7-SRLS-1 02-A 3 X X</b>	BRACKET: T=With Bracket None=Without Bracket
SRLS:Sub-miniature Rocker Switch Series		Handle Cap Type: R=Red B=Black W=White Y=Yello G=Green BL=Blue
POLES: 1=Single Pole 2=Double Pole		Terminal Type: 1=Solder terminal 2=Pc terminal 3=Pc-H terminal 4=Pc-V terminal
CIRCUIT: 01=ON-OFF 02=ON-ON 03=ON-OFF-ON		Handle Type: A=Standard C=Short