


CHI A/R SWR MKR 1: 1.509 U
 REF 1.000 U 1.000U/ 2 400 000 000.HZ

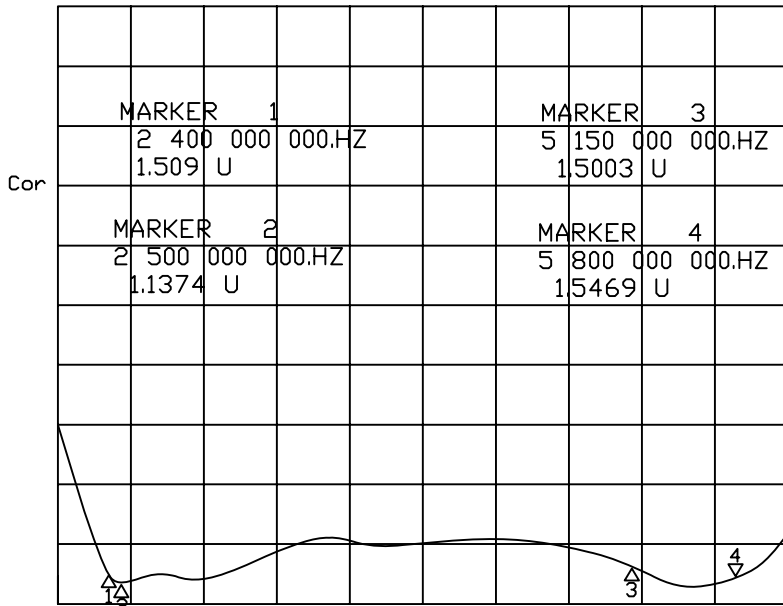

CHI START 2 200 000 000.HZ STOP 6 000 000 000.HZ

Specification:

Frequency : 2400 ~ 5800MHz

Gain : 7dBi

Vswr : 2.0 Max.

Impedance : 50 Ω

Polarization : Vertical

Radiation : OMNIDIRECTIONAL


Max power : 50W

Shell material : PVC

Connector : SMA Pin

Lightning protection: DC Grounding

Operating Temperature : -30°C to +70°C

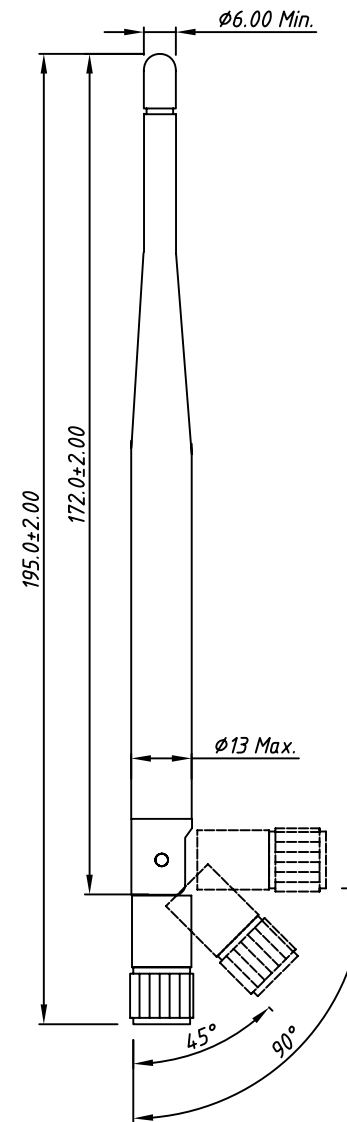

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	Description:
X.	±0.60	X.	±5°	UNITS	mm
.X	±0.38	.X	±3°	SHEET SIZE	A4
.XX	±0.25	.XX	±2°	KLS P/N:	KLS1-WIFI-2458001
Draw by: Date		2016-11-11		KLS ELECTRONIC CO., LTD.	
Check by:: Date		2016-11-11			
SCALE		SHEET	OF		

WIFI 2.4G /5.8G Antenna

KLS ELECTRONIC CO., LTD.