

# SPECIFICATION FOR APPROVAL

客戶 (Customer):

客戶料號 (Customer P/N):

型號 (Supplier P/N):

XHXDZ-26MM-8  $\Omega$  1W-2P2.0

產品名稱 (Description):

喇叭 (Speaker)

產品規格 (Specification):

26MM 塑膠內磁 2.0 端子

<b>Model No.</b>	<b>XHXDZ-26MM-8Ω 1W-2P2.0</b>	<b>Date</b>	<b>2021-11-21</b>	<b>Page No.</b>	<b>1 / 6</b>
------------------	-------------------------------	-------------	-------------------	-----------------	--------------

## 產品規格內容 (SPECIFICATION)

### 1. 使用範圍 (Scope)

此份規格書是針對多媒體產品內，所使用的微型揚聲器單體所提出的報告。

This specification covers our product of miniature speaker unit for multimedia product.

### 2. 标准测试条件(Test condition)

一般规格试验状态（特殊要求除外）：常温 5~35℃，常湿 45%~85%，气压 860~1060hPa.

判定上有疑问时，试验状态为：温度 20±2℃，相对湿度 60%~70%，气压 860~1060 hPa.

The test conditions unless otherwise specified should be normal temperature 5 to 35 °C, Normal humidity 45 to 85% and normal atmospheric pressure 860 to 1060 hPa, However, if there arises a doubt in judgment, the test conditions shall be as follows:

Temperature 20±2℃

Humidity 60%~70%

Atmosphere 860~1060 hPa

### 3. 電聲特性 (ELECTRO-ACOUSTIC CHARACTERISTICS)

#### 3.1 額定阻抗(Rated Impedance):

8.0Ω ± 20% (AT 1.6K Hz , 1.0 Vrms)

#### 3.2 額定輸入功率(Rated Input Power)

0.8 Watt (At 2.0 Vrms white noise 96 Hours)

#### 3.3 最大輸入功率(Max. Input Power)

1.0Watt

#### 3.4 最低共振頻率(Resonant Frequency)

900 Hz ± 20%

#### 3.5 輸出音壓(Output S.P.L)

88± 3dB (1.0 Watt , 0.1 Meter. Average at 1.5K, 2.0K, 2.5K, 3.0K Hz)

#### 3.6 實效頻率範圍(Frequency Range)

Fo ~ 20KHz (By Output S.P.L. -10dB)

#### 3.7 失真率(Distortion)

Less than 5% (At 1.6KHz , 2.83 Vrms)

#### 3.8 工作溫度(Operating Temperature)

-25℃ ~ +50℃


#### 3.9 儲存溫度(Storage temperature)

-25℃ ~ +55℃

Model No.	XHXDZ-26MM-8 Ω 1W-2P2.0	Date	2021-11-21	Page No.	2 / 6
-----------	-------------------------	------	------------	----------	-------

4. 可靠性測試 (Reliability Test)

4.1 高低溫差循環測試(Temperature Cycling Test)

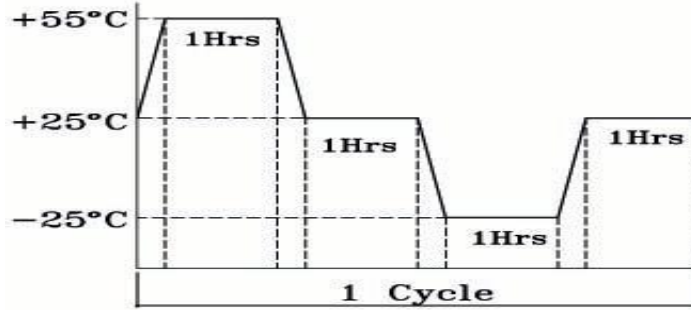

A	Low Temperature (-25°C±3°C)
B	High Temperature (+55°C±3°C)
C	Number of Cycle (3 Cycles)
D	Duration of Exposure 1 Hours, at Each Temperature Extremes
E	Duration of Recovery 1 Hours

4.2 抗濕度試驗(Humidity Test)

A	相對濕度(Relative Humidity)	90-95% at + 40°C ± 3°C
B	測試時間(Durations)	96 Hours
C	恢覆時間(Durations of recovery)	6 Hours

4.3 連續負載測試(Load Test)

White Noise Without Weighted Filter 2.5 Volts.(RMS) 100 Hrs.

4.4 跌落試驗(Drop Test)

75 cm Free Falling On Concrete Floor, 10 Times.

4.5 異常音測試(Buzzes & Rattles)

Sine wave between at 2.5Vrms / 200~5000Hz



4.6 極性測試(Polarity test)

Diaphragm Shall Move Forward When Apply a Positive DC. Current to the “+” or “Marked” Terminal.

# 產品規格內容 (SPECIFICATION)

Model No.	XHXDZ-26MM-8Ω 1W-2P2.0	Date	2021-11-21	Page No.	3 / 6
-----------	------------------------	------	------------	----------	-------


## 5.測量方式 (Measurement Method)

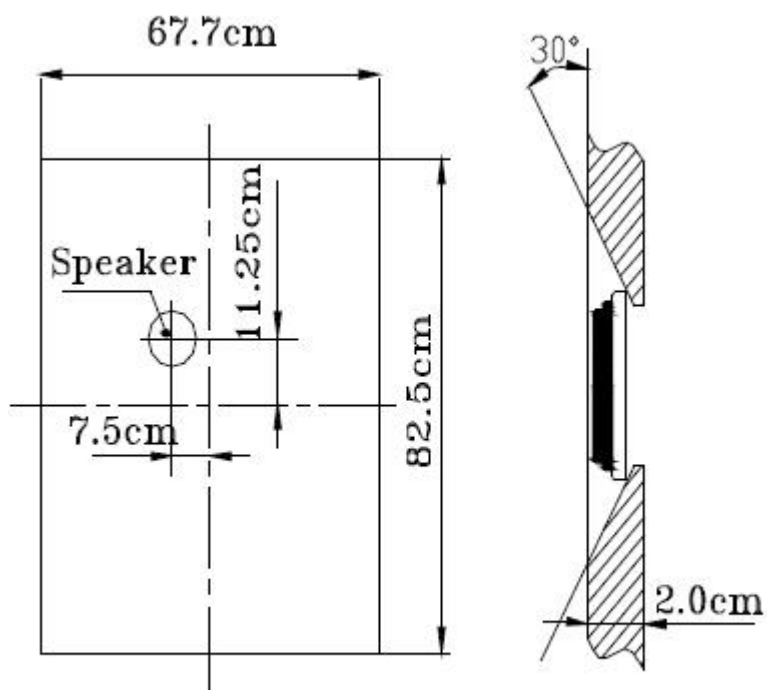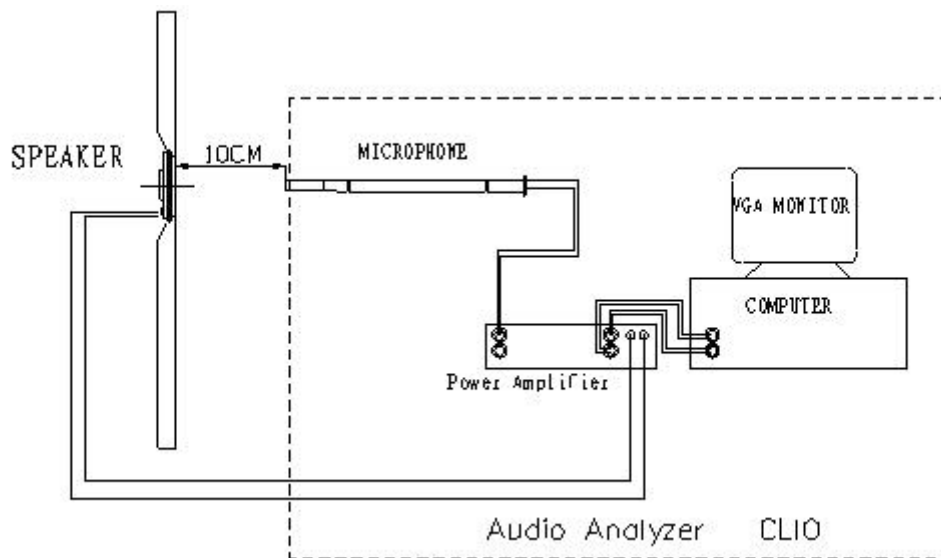


# 產品規格內容 (SPECIFICATION)

Model No.	XHXDZ-26MM-8Ω 1W-2P2.0	Date	2021-11-21	Page No.	4/6
-----------	------------------------	------	------------	----------	-----

## 6. 頻率響應曲線圖(Frequency Response Curve)

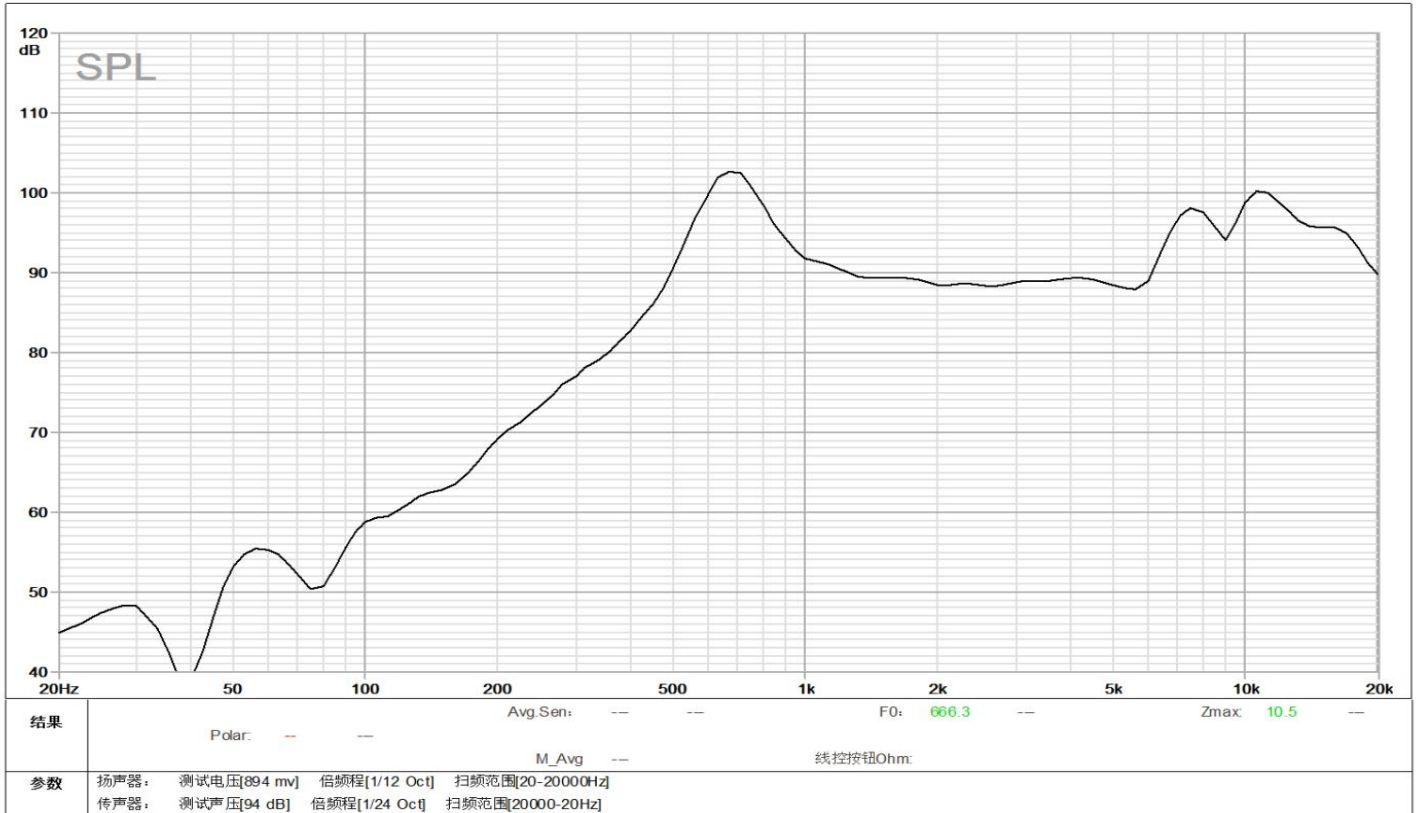

## 7. 阻抗曲線圖(Impedance Curve)

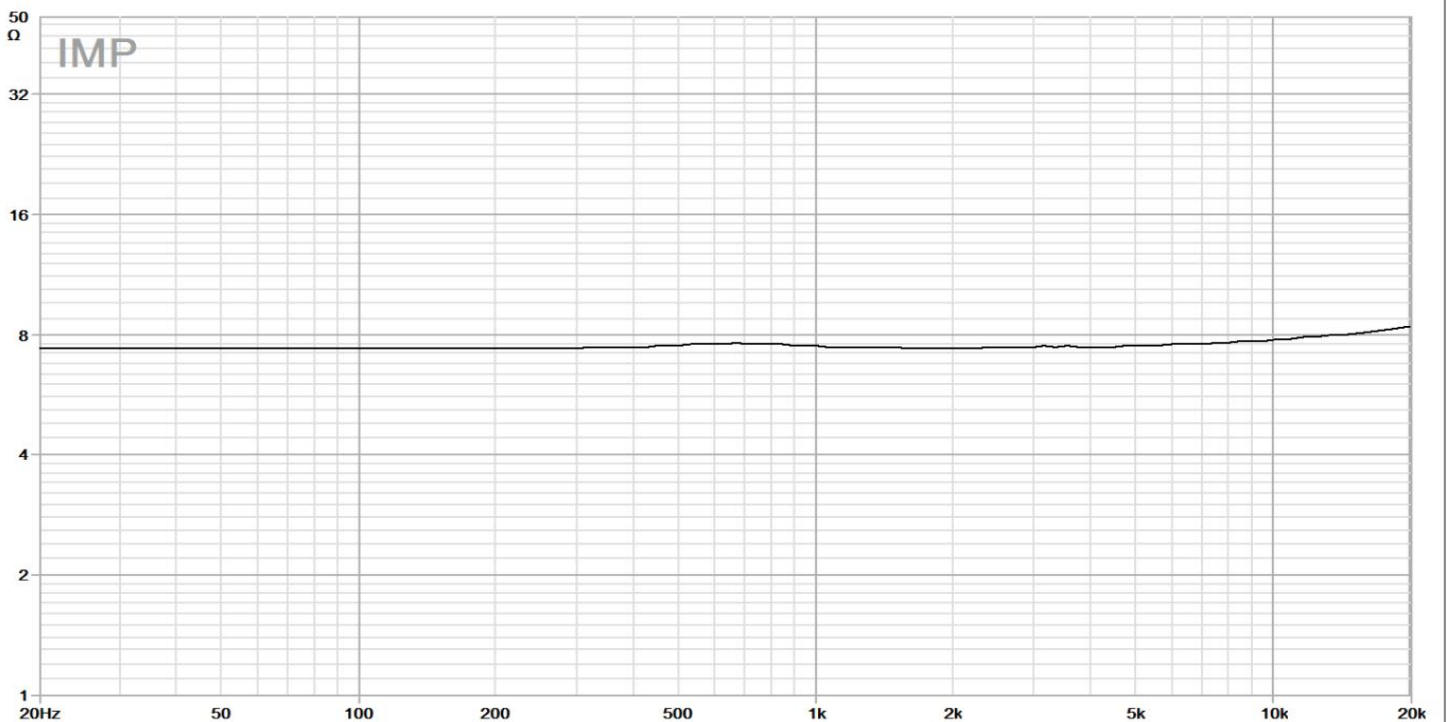


# 產品規格內容 (SPECIFICATION)

Model No.	XHXDZ-26MM-8Ω 1W-2P2.0	Date	2021-11-21	Page No.	5 / 6
-----------	------------------------	------	------------	----------	-------

## 8. 喇叭外觀描述

(Unit:mm tolerance:±0.3)

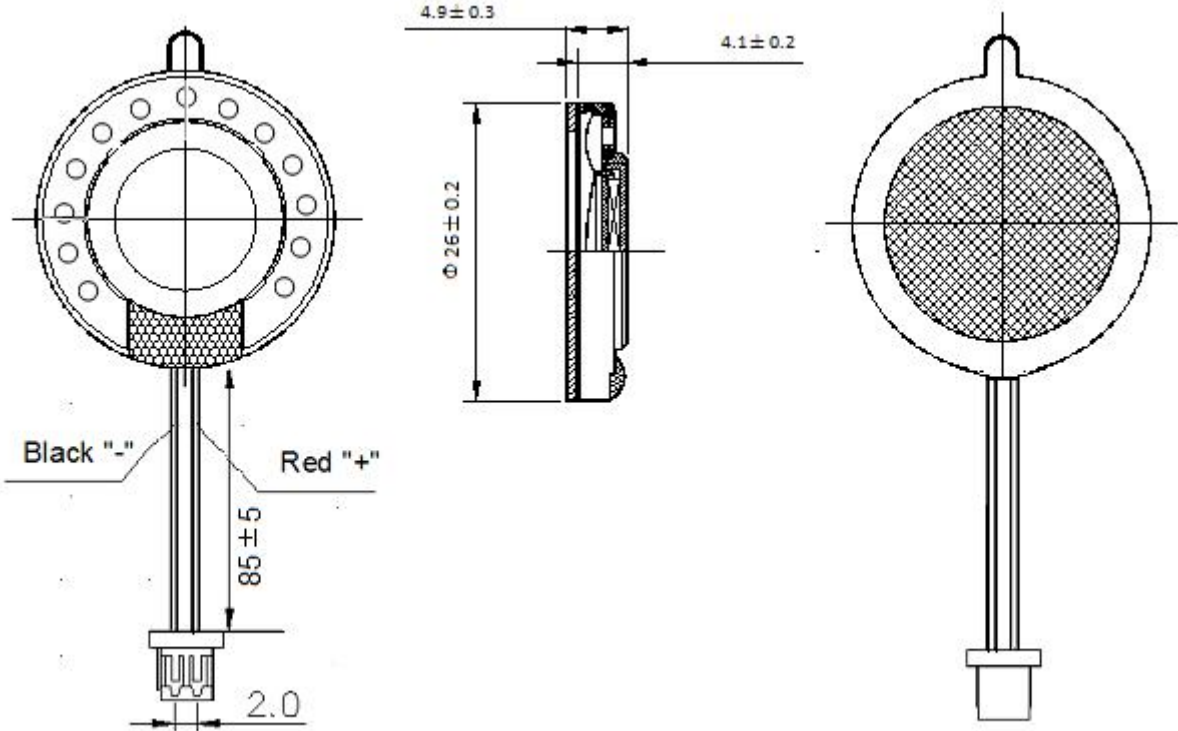

產品規格內容 (SPECIFICATION)

Model No.	XHXDZ-26MM-8Ω 1W-2P2.0	Date	2021-11-21	Page No.	6/6
-----------	------------------------	------	------------	----------	-----

10. 包裝示意圖(Packing Standard):

(Unit:cm tolerance:±3)

PACKING STANDARD:

